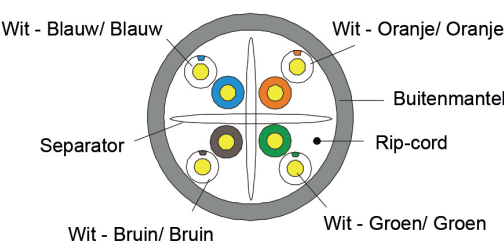


## Cat6 - UTP - STUG - LSZH

Categorie	U/UTP CAT6-4P-LSZH																																																																																																																						
Referentie	ISO/IEC 11801 TIA-568-C.2																																																																																																																						
CPR Classificatie	Eca																																																																																																																						
Kern	Stug - 100% koper																																																																																																																						
Afscherming	UTP	<b>Technische prestaties (100m):</b> <table><tr><th>Frequentie (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>Phase DELAY ≤ns</th></tr><tr><td>1</td><td>20.0</td><td>2.03</td><td>74.3</td><td>570.00</td></tr><tr><td>4.0</td><td>23.0</td><td>3.78</td><td>65.3</td><td>552.00</td></tr><tr><td>8.0</td><td>24.5</td><td>5.32</td><td>60.8</td><td>546.73</td></tr><tr><td>10.0</td><td>25.0</td><td>5.95</td><td>59.3</td><td>545.38</td></tr><tr><td>16.0</td><td>25.0</td><td>7.55</td><td>56.2</td><td>543.00</td></tr><tr><td>20.0</td><td>25.0</td><td>8.47</td><td>54.8</td><td>542.05</td></tr><tr><td>25.0</td><td>24.3</td><td>9.51</td><td>53.3</td><td>541.20</td></tr><tr><td>31.25</td><td>23.6</td><td>10.67</td><td>51.9</td><td>540.44</td></tr><tr><td>62.5</td><td>21.5</td><td>15.38</td><td>47.7</td><td>538.55</td></tr><tr><td>100</td><td>20.1</td><td>19.80</td><td>44.3</td><td>537.60</td></tr><tr><td>200</td><td>18.0</td><td>28.98</td><td>39.8</td><td>536.54</td></tr><tr><td>250</td><td>17.3</td><td>32.85</td><td>38.3</td><td>536.27</td></tr></table> <table><tr><th>Frequentie (Mhz)</th><th>PSNEXT ≥dB</th><th>ELFEXT ≤dB</th><th>PSELFEXT ≥dB</th></tr><tr><td>1</td><td>72.3</td><td>67.8</td><td>64.8</td></tr><tr><td>4.0</td><td>63.3</td><td>55.8</td><td>52.8</td></tr><tr><td>8.0</td><td>58.8</td><td>49.7</td><td>46.7</td></tr><tr><td>10.0</td><td>57.3</td><td>47.8</td><td>44.8</td></tr><tr><td>16.0</td><td>54.2</td><td>43.7</td><td>40.7</td></tr><tr><td>20.0</td><td>52.8</td><td>41.8</td><td>38.8</td></tr><tr><td>25.0</td><td>51.3</td><td>39.8</td><td>36.8</td></tr><tr><td>31.25</td><td>49.9</td><td>37.9</td><td>34.9</td></tr><tr><td>62.5</td><td>45.4</td><td>31.9</td><td>28.9</td></tr><tr><td>100</td><td>42.3</td><td>27.8</td><td>24.8</td></tr><tr><td>200</td><td>37.8</td><td>21.8</td><td>18.8</td></tr><tr><td>250</td><td>36.3</td><td>19.8</td><td>16.8</td></tr></table>	Frequentie (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	Phase DELAY ≤ns	1	20.0	2.03	74.3	570.00	4.0	23.0	3.78	65.3	552.00	8.0	24.5	5.32	60.8	546.73	10.0	25.0	5.95	59.3	545.38	16.0	25.0	7.55	56.2	543.00	20.0	25.0	8.47	54.8	542.05	25.0	24.3	9.51	53.3	541.20	31.25	23.6	10.67	51.9	540.44	62.5	21.5	15.38	47.7	538.55	100	20.1	19.80	44.3	537.60	200	18.0	28.98	39.8	536.54	250	17.3	32.85	38.3	536.27	Frequentie (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	1	72.3	67.8	64.8	4.0	63.3	55.8	52.8	8.0	58.8	49.7	46.7	10.0	57.3	47.8	44.8	16.0	54.2	43.7	40.7	20.0	52.8	41.8	38.8	25.0	51.3	39.8	36.8	31.25	49.9	37.9	34.9	62.5	45.4	31.9	28.9	100	42.3	27.8	24.8	200	37.8	21.8	18.8	250	36.3	19.8	16.8
Frequentie (Mhz)	RL ≥dB		ATT ≤dB	NEXT ≥dB	Phase DELAY ≤ns																																																																																																																		
1	20.0		2.03	74.3	570.00																																																																																																																		
4.0	23.0		3.78	65.3	552.00																																																																																																																		
8.0	24.5		5.32	60.8	546.73																																																																																																																		
10.0	25.0		5.95	59.3	545.38																																																																																																																		
16.0	25.0		7.55	56.2	543.00																																																																																																																		
20.0	25.0		8.47	54.8	542.05																																																																																																																		
25.0	24.3		9.51	53.3	541.20																																																																																																																		
31.25	23.6		10.67	51.9	540.44																																																																																																																		
62.5	21.5		15.38	47.7	538.55																																																																																																																		
100	20.1		19.80	44.3	537.60																																																																																																																		
200	18.0		28.98	39.8	536.54																																																																																																																		
250	17.3		32.85	38.3	536.27																																																																																																																		
Frequentie (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB																																																																																																																				
1	72.3	67.8	64.8																																																																																																																				
4.0	63.3	55.8	52.8																																																																																																																				
8.0	58.8	49.7	46.7																																																																																																																				
10.0	57.3	47.8	44.8																																																																																																																				
16.0	54.2	43.7	40.7																																																																																																																				
20.0	52.8	41.8	38.8																																																																																																																				
25.0	51.3	39.8	36.8																																																																																																																				
31.25	49.9	37.9	34.9																																																																																																																				
62.5	45.4	31.9	28.9																																																																																																																				
100	42.3	27.8	24.8																																																																																																																				
200	37.8	21.8	18.8																																																																																																																				
250	36.3	19.8	16.8																																																																																																																				
AWG	23																																																																																																																						
Diameter kabel	6,1 mm																																																																																																																						
Lengte	305m																																																																																																																						
Bandbreedte	250.0 MHz																																																																																																																						
Buigradius	8x Diameter kabel																																																																																																																						
Maximale trekkracht (Mpa)	≥ 13.5																																																																																																																						
Materiaal buitenmantel	LSZH																																																																																																																						
Kleur buitenmantel	Blauw																																																																																																																						
Aderkleuren	1 - Wit-Blauw/ Blauw																																																																																																																						
	2 - Wit-Oranje/ Oranje																																																																																																																						
	3 - Wit-Groen/ Groen																																																																																																																						
	4 - Wit-Bruin/ Bruin																																																																																																																						
Rip-cord	Aanwezig																																																																																																																						
Verpakking	Trekdoos																																																																																																																						