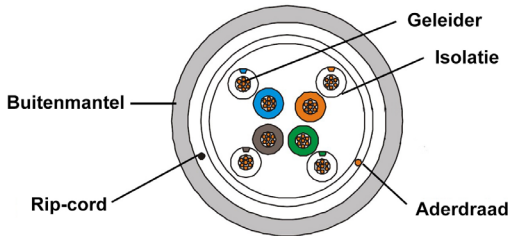


Cat5e - FTP - SOEPEL - PVC

Categorie	PATCH F/UTP CAT5E-4P-PVC																																																																																																				
Referentie	ISO/IEC 11801 TIA-568-C.2																																																																																																				
CPR Classificatie	Fca																																																																																																				
Kern	Soepel - 100% koper																																																																																																				
Afscherming	FTP	<div>Technische prestaties (<30m):</div> <table><thead><tr><th>Frequentie (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>DELAY ≤ns</th></tr></thead><tbody><tr><td>1</td><td>19.0</td><td>3.0</td><td>60.0</td><td>521</td></tr><tr><td>4.0</td><td>19.0</td><td>3.9</td><td>54.8</td><td>504</td></tr><tr><td>8.0</td><td>19.0</td><td>5.5</td><td>50.0</td><td>500</td></tr><tr><td>10.0</td><td>19.0</td><td>6.2</td><td>48.5</td><td>498</td></tr><tr><td>16.0</td><td>19.0</td><td>7.9</td><td>45.2</td><td>496</td></tr><tr><td>20.0</td><td>19.0</td><td>8.9</td><td>43.7</td><td>495</td></tr><tr><td>25.0</td><td>18.0</td><td>10.0</td><td>42.1</td><td>495</td></tr><tr><td>31.25</td><td>17.1</td><td>11.2</td><td>40.5</td><td>494</td></tr><tr><td>62.5</td><td>14.1</td><td>16.2</td><td>35.7</td><td>492</td></tr><tr><td>100</td><td>12.0</td><td>21.0</td><td>32.3</td><td>491</td></tr></tbody></table> <table><thead><tr><th>Frequentie (Mhz)</th><th>PSNEXT ≥dB</th><th>ELFEXT ≤dB</th><th>PSELFEXT ≥dB</th></tr></thead><tbody><tr><td>1</td><td>57.0</td><td>58.6</td><td>55.6</td></tr><tr><td>4.0</td><td>51.8</td><td>46.6</td><td>43.6</td></tr><tr><td>8.0</td><td>47.0</td><td>40.6</td><td>37.5</td></tr><tr><td>10.0</td><td>45.5</td><td>38.6</td><td>35.6</td></tr><tr><td>16.0</td><td>42.2</td><td>34.5</td><td>31.5</td></tr><tr><td>20.0</td><td>40.7</td><td>32.6</td><td>29.6</td></tr><tr><td>25.0</td><td>39.1</td><td>30.7</td><td>27.7</td></tr><tr><td>31.25</td><td>37.5</td><td>28.7</td><td>25.7</td></tr><tr><td>62.5</td><td>32.7</td><td>22.7</td><td>19.7</td></tr><tr><td>100</td><td>29.3</td><td>18.6</td><td>15.6</td></tr></tbody></table>	Frequentie (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns	1	19.0	3.0	60.0	521	4.0	19.0	3.9	54.8	504	8.0	19.0	5.5	50.0	500	10.0	19.0	6.2	48.5	498	16.0	19.0	7.9	45.2	496	20.0	19.0	8.9	43.7	495	25.0	18.0	10.0	42.1	495	31.25	17.1	11.2	40.5	494	62.5	14.1	16.2	35.7	492	100	12.0	21.0	32.3	491	Frequentie (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	1	57.0	58.6	55.6	4.0	51.8	46.6	43.6	8.0	47.0	40.6	37.5	10.0	45.5	38.6	35.6	16.0	42.2	34.5	31.5	20.0	40.7	32.6	29.6	25.0	39.1	30.7	27.7	31.25	37.5	28.7	25.7	62.5	32.7	22.7	19.7	100	29.3	18.6	15.6
Frequentie (Mhz)	RL ≥dB		ATT ≤dB	NEXT ≥dB	DELAY ≤ns																																																																																																
1	19.0		3.0	60.0	521																																																																																																
4.0	19.0		3.9	54.8	504																																																																																																
8.0	19.0		5.5	50.0	500																																																																																																
10.0	19.0		6.2	48.5	498																																																																																																
16.0	19.0		7.9	45.2	496																																																																																																
20.0	19.0		8.9	43.7	495																																																																																																
25.0	18.0		10.0	42.1	495																																																																																																
31.25	17.1		11.2	40.5	494																																																																																																
62.5	14.1		16.2	35.7	492																																																																																																
100	12.0		21.0	32.3	491																																																																																																
Frequentie (Mhz)	PSNEXT ≥dB		ELFEXT ≤dB	PSELFEXT ≥dB																																																																																																	
1	57.0		58.6	55.6																																																																																																	
4.0	51.8		46.6	43.6																																																																																																	
8.0	47.0		40.6	37.5																																																																																																	
10.0	45.5		38.6	35.6																																																																																																	
16.0	42.2		34.5	31.5																																																																																																	
20.0	40.7		32.6	29.6																																																																																																	
25.0	39.1		30.7	27.7																																																																																																	
31.25	37.5	28.7	25.7																																																																																																		
62.5	32.7	22.7	19.7																																																																																																		
100	29.3	18.6	15.6																																																																																																		
AWG	26																																																																																																				
Diameter kabel	6 mm																																																																																																				
Lengte	100m																																																																																																				
Brandbreedte	100.0 MHz																																																																																																				
Buigradius	8x Diameter kabel																																																																																																				
Maximale trekkracht (Mpa)	≥ 10																																																																																																				
Materiaal buitenmantel	PVC																																																																																																				
Kleur buitenmantel	Grijs																																																																																																				
Aderkleuren	1 - Blauw/ Wit-Blauw																																																																																																				
	2 - Oranje/ Wit-Oranje																																																																																																				
	3 - Groen/ Wit-Groen																																																																																																				
	4 - Bruin/ Wit-Bruin																																																																																																				
Rip-cord	Aanwezig																																																																																																				
Verpakking	Trekdoos																																																																																																				